
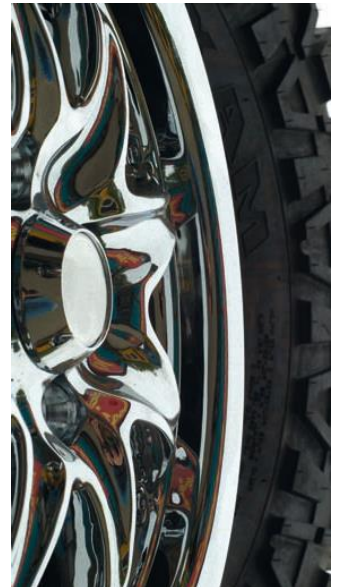



## Product Data Sheet

### NewPro Metal Corrosion protection non -adhesive coating for industrial application Na 129

Coating material to provide lasting protection for matt surfaces. It enhances surface smoothness, reduces staining and makes surfaces easier to clean. Durable bonding with the surface ensures high mechanical and chemical resistance. Cures at room temperature.

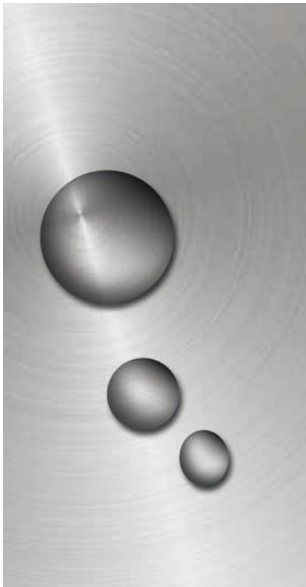

#### How it works:

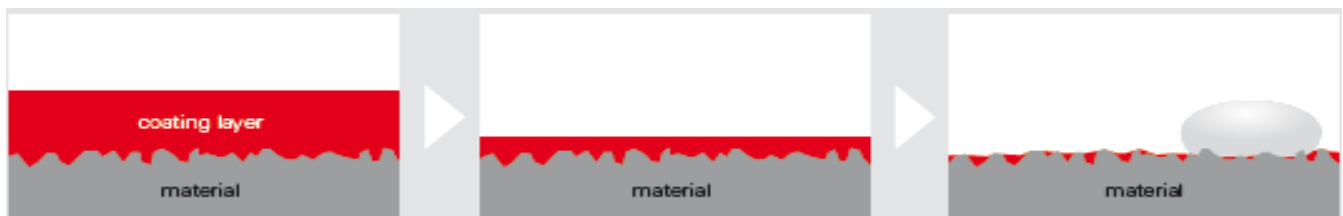

NewPro – Neue Produkte & innovative Ideen für Oberflächen und Reinigung  
Lutz-Henning Robitzsch  
Ricarda-Huch-Weg 2 D-40789 Monheim a. Rhein  
Tel: +49 (0) 2173/964280 Fax: +49 (0) 2173/964282  
eMail: [news@newpro.de](mailto:news@newpro.de) Internet: [www.g-pro.com](http://www.g-pro.com)

**GRAFFITI  
MAGIC**



**Main areas of use:** Stainless steel, chrome, aluminium, brass, copper and other metals.

**Based on:** Solvent-based hybrid matrix.

**Colour:** Colourless, transparent.

**Available quantities:**

- 1-litre PE bottle (0,8kg)
- 5-litre PE canister(3,6kg)
- 20-litre PE canister(16,0kg)
- 200-litre PE drum(168,0kg)
- 1000-litre IBC (500,0kg)
- (industrial bulk container)

**Storage:** Unopened, in original container and at temperatures of 5°C to 35°C(41°F to 95°F) storage is possible for at least 6 months. Protect from frost or temperatures above 35°C.  
Check for signs of deterioration if the recommended storage period has been exceeded.  
Seal tightly after opening. Storage must be well ventilated.

**Preparation:** No preparation necessary – can be applied straight from the container.

**Application:** Please refer to separate instructions.

**Processing temperature:** Air and surface temperature 5°C to 35°C(41°F to 95°F). Curing within 24 hours. Variations in external conditions may affect curing times. Thermal curing at 80°C (176°F) reduces curing time.

**Coverage:** Approx. 50 ml per m<sup>2</sup> (spray application).

**Safety advice:** Please refer to instructions an health & safety advice on the packaging and ensure compliance with relevant industry Health & Safety regulations. For further information see material safety data sheet.

**Cleaning of equipment:** With alcohol or thinner immediately after application. Potassium hydroxide bath if later.

**Retouching and recoating:** Remove with standard paint stripper or by sanding down.

**Cleaning of coated surfaces:** Once cured, surfaces can be cleaned using a mild household detergent.

**Disposal:** Dispose of any left-over material in accordance with relevant legislation for disposal of paints an solvents.

### Technical data:

**Salt spray test (EN ISO 9227 NSS):** 240 hrs (aluminium),  
500 hrs (stainless steel)

**Weathering (EN ISO 4892-3: 4h UV-B 60°C; 4h condensation 50°C):** 250 hrs

**Temperature/humidity cycling (DBL 7906):**  
**15 mins. 23°C; 4h -30°C; 15 min 23°C;** 10 cycles  
**4h 80°C; 30 min 40°C 98% humidity)**

**Chemical resistance :** pH 2 to pH 10

**Pencil hardness:** 4-5H

**Taber test (CS10 F wheel; 1000 rotations):** 5mg

**Temperature resistance:** durable up to 200°C (392 F)

**Surface energy:** 16 mN/m

This technical data sheet has been compiled on the basis of our latest technical knowledge and experience. Considering the wide variety of different surface materials and conditions, it remains the user's responsibility to determine suitability of the intended application for the specific purpose and to use their judgement and technical expertise in assessing the surface conditions. Since conditions of use are not under the manufacturer's control, the content of this technical data sheet cannot be taken as acceptance of any liability. Terms & conditions apply. This data sheet will be superseded by any later versions released. As at 04/09.